



GRACO FIRE-BALL 425 HIGH VOLUME GREASE PUMP

10:1 RATIO GREASE PUMP

The Fire-Ball 425 features a 4.25 inch (107.9 mm) air motor to supply the power you need for long pipe runs and higher-volume dispensing. An ideal choice for applications where multiple dispenses happen at the same time.

The Fire-Ball 425 is the pump of choice for your most demanding high volume applications.

FEATURES & BENEFITS

- **Durable Casting** - Thick cast aluminum air motor housing offers unmatched durability.
- **Fewer Repairs** - Fewer moving parts in the air motor assembly means less downtime and low repair cost.
- **Superior Sealing** - Non-metallic poppet valves offer positive sealing performance, even with contaminated "dirty" air environments for long life without repair.
- **Extended Seal Life** - In-line pump design aligns the air motor piston and fluid piston rods to maximize seal life.
- **Corrosion-Resistant** - Corrosion-resistant design utilizes liquid salt nitriding, nickel plating, stainless steel, aluminum and chrome on key components for longer life.



SPECIFICATIONS:

Air Inlet Size (in / mm)	0.5 / 12.7
Air Inlet Thread Gender	Female
Air Inlet Thread Type	NPT
Air Motor Effective Diameter (in)	4.25
Compatible Material	Grease
Fluid Outlet Size (in / mm)	1 / 25.4
Fluid Outlet Thread Gender	Female

Fluid Outlet Thread Type	NPT
Maximum Air Inlet Pressure (bar / psi)	12.41 / 180
Maximum Continuous Cycle Rate (cpm)	60
Maximum Flow Rate (l/min)	13.25
Maximum Intermittent Cycle Rate (cpm)	60
Maximum Working Pressure (bar)	#124
Wetted Material	Steel, Brass, Aluminium, Leather, Buna-N

PART NO.		DIMENSIONS	WEIGHT
AF-G-965124	GRACO 10:1 FB 425 Series Stub Mount Pump	89x25x25	15 Kg
AF-G-965129	GRACO 10:1 FB 425 Series Grease Drum Pump	160x30x26	20 Kg



GRACO FIRE-BALL 425 HIGH VOLUME GREASE PUMP




50:1 RATIO GREASE PUMP

The Fire-Ball 425 features a 4.25 inch (107.9 mm) air motor to supply the power you need for long pipe runs and higher-volume dispensing. An ideal choice for applications where multiple dispenses happen at the same time.

The Fire-Ball 425 is the pump of choice for your most demanding high volume applications.

FEATURES & BENEFITS

- Durable Casting - Thick cast aluminum air motor housing offers unmatched durability.
- Fewer Repairs - Fewer moving parts in the air motor assembly means less downtime and low repair cost.
- Superior Sealing - Non-metallic poppet valves offer positive sealing performance, even with contaminated "dirty" air environments for long life without repair.
- Extended Seal Life - In-line pump design aligns the air motor piston and fluid piston rods to maximize seal life.
- Corrosion-Resistant - Corrosion-resistant design utilizes liquid salt nitriding, nickel plating, stainless steel, aluminum and chrome on key components for longer life.

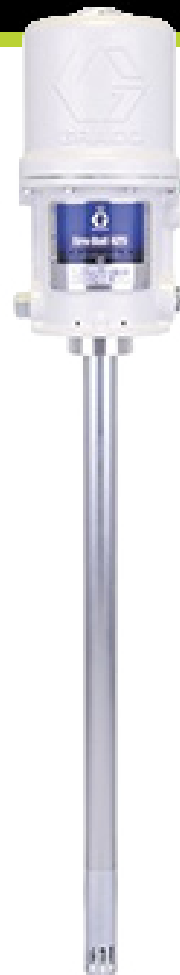

SPECIFICATIONS:

Air Inlet Size (in / mm)	0.5 / 12.7
Air Inlet Thread Gender	Female
Air Inlet Thread Type	NPT
Compatible Material	Grease
Fluid Outlet Size (in / mm)	3/8 / 9.525
Fluid Outlet Thread Gender	Female
Fluid Outlet Thread Type	NPT

Maximum Air Inlet Pressure (bar / psi)	10.34 / 150
Maximum Flow Rate (l/min)	1.89
Maximum Working Pressure (bar)	#517
Pump Ratio	50:1
Seal Material	Nitrile Rubber
Type	Pneumatic Piston Pump
Wetted Material	CS, Steel, Brass, Aluminum, Leather

PART NO.

DIMENSIONS

WEIGHT

AF-G-205395 GRACO 50:1 FB 425 Series 180kg Grease Pump Only

162x28x25

19 Kg



GRACO FIRE-BALL 425 HIGH VOLUME GREASE PUMP




75:1 RATIO GREASE PUMP

The Fire-Ball 425 features a 4.25 inch (107.9 mm) air motor to supply the power you need for long pipe runs and higher-volume dispensing. An ideal choice for applications where multiple dispenses happen at the same time.

The Fire-Ball 425 is the pump of choice for your most demanding high volume applications.

FEATURES & BENEFITS

- Durable Casting - Thick cast aluminum air motor housing offers unmatched durability.
- Fewer Repairs - Fewer moving parts in the air motor assembly means less downtime and low repair cost.
- Superior Sealing - Non-metallic poppet valves offer positive sealing performance, even with contaminated "dirty" air environments for long life without repair.
- Extended Seal Life - In-line pump design aligns the air motor piston and fluid piston rods to maximize seal life.
- Corrosion-Resistant - Corrosion-resistant design utilizes liquid salt nitriding, nickel plating, stainless steel, aluminum and chrome on key components for longer life.

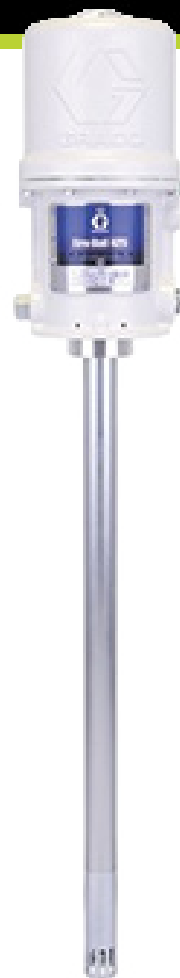

SPECIFICATIONS:

Air Inlet Size (in / mm)	0.5 / 12.7
Air Inlet Thread Gender	Female
Air Inlet Thread Type	NPT
Compatible Material	Grease
Fluid Outlet Size (in / mm)	3/8 / 9.525
Fluid Outlet Thread Gender	Female
Fluid Outlet Thread Type	NPT

Maximum Air Inlet Pressure (bar / psi)	6.9 / 100
Maximum Flow Rate (l/min)	1.25
Maximum Working Pressure (bar)	#517
Maximum Continuous Cycle Rate (cpm)	60
Seal Material	Nitrile Rubber
Type	Pneumatic Piston Pump
Wetted Material	CS, Steel, Brass, Aluminium, Leather

PART NO.

DIMENSIONS

WEIGHT

AF-G-239730

GRACO Fireball 425 Series 75:1 Grease Pump (160-180 kg).

145x30x26

19 Kg