



GRACO HUSKY 515 DIAPHRAGM PUMP


Husky 515 AC 13 mm NPT Standard Pump, PP Centre Section, AC Seats, BN Balls & BN Diaphragm

The Husky 515 air-operated double diaphragm pump features a stall-free low pulsation air valve which provides a smooth and rapid changeover.

The bolt through fluid cover design eliminates leaks and makes the Husky safer with higher reliability.

FEATURES & BENEFITS:

- Centre and end porting options.
- No mechanical seals to cause fluid leaks or failures
- Runs quietly at less than 85 dBA with easy-to-use remote muffler capability for even lower noise levels
- Easy-to-service air valve and ball checks
- Operates on as little as 1.4 bar (0.14 MPa, 20 psi)
- Split manifold option to pump multiple fluids without mixing
- Delivery up to 56.7 lpm (15 gpm)
- Easy-to-service air valve and ball checks
- Reliable air valve for years of dependable performance

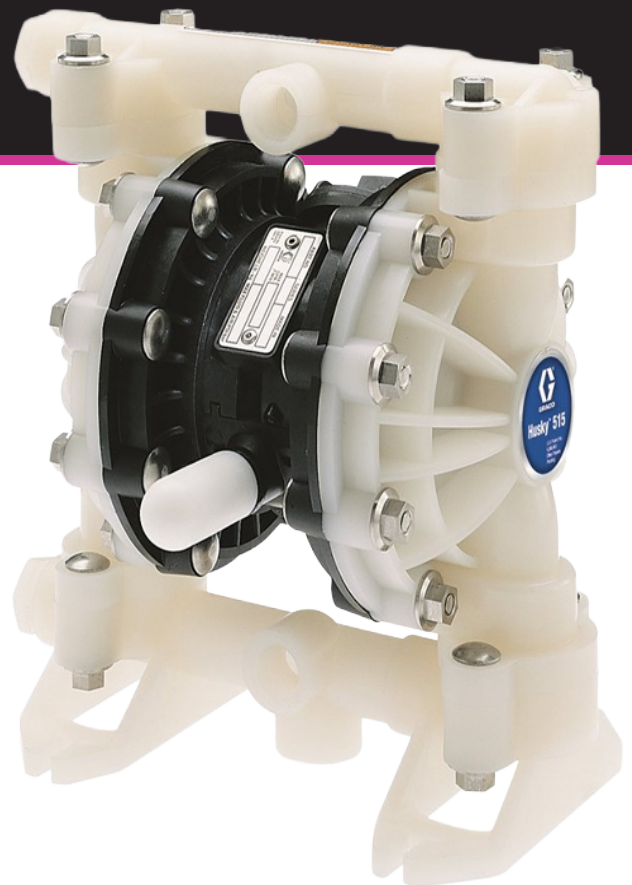

SPECIFICATIONS:

Air Exhaust Port Size (in)	3/8
Air Exhaust Port Thread Gender	Female
Air Inlet Size (in)	1/4
Air Inlet Thread Gender	Female
Fluid Inlet Thread Gender	Female
Fluid Outlet Thread Gender	Female
Maximum Air Consumption (SCFM)	28
Maximum Air Pressure (bar / psi)	7 / 100
Maximum Cycle Rate (CPM)	400

Maximum Flow Rate (L/min)	57
Maximum Fluid Pressure (bar / psi)	7 / 100
Maximum Operating Temperature (C)	82
Maximum Solid Size (mm)	2.4
Minimum Operating Temperature (C)	4
Diaphragm compatible material	Buna
Compressor Required	Yes
Dimensions	305x274x213
Weight	5 Kg

PART NO.

AF-G-D51277 GRACO Husky 515 Poly 13 mm NPT Diaphragm Pump