



RAASM 900 SERIES GREASE PUMP

Series 900 industrial air operated pumps for short-long distance grease distribution, for high pressure greasing.

Ideal for transferring grease and high viscosity oil. The double action guarantees the delivery of a continuous and constant flow, suitable for the numerous needs of modern industry. The high quality of the materials used and the anticorrosion treatments reduce internal friction and limit wear over time.



AF-RA-90F/451

AF-RA-91F/451

AF-RA-91C/701

45:1 RATIO SPECIFICATIONS:

Flow Rate	4400 g/min
Ratio	45:1
Compatible fluids	High viscosity oils and greases
Suction tube upper body	Carbon steel
Suction tube	Carbon steel
Air inlet connection	G 1/2" (f)
Fluid outlet connection	G 1/2" (f)
Max supply pressure	8 bar
Max air consumption	1,6 m3/min
Noise level	80 dB


70:1 RATIO SPECIFICATIONS:

Flow Rate	3000 g/min
Ratio	70:1
Compatible fluids	High viscosity oils and greases
Suction tube upper body	Aluminum
Suction tube	Carbon steel
Air inlet connection	G 1/2" (f)
Fluid outlet connection	G 1/2" (f)
Max supply pressure	8 bar
Max air consumption	1,6 m3/min
Noise level	80 dB


PART NO.

WEIGHT


AF-RA-90F/451	RAASM 900 Series 45:1 Ratio Grease Stub Pump Only	17 Kg
AF-RA-91F/451	RAASM 900 Series 45:1 Ratio 180kg Grease Pump Only	19 Kg
AF-RA-91C/701	RAASM 900 Series 70:1 Ratio 180kg Grease Pump Only	19 Kg

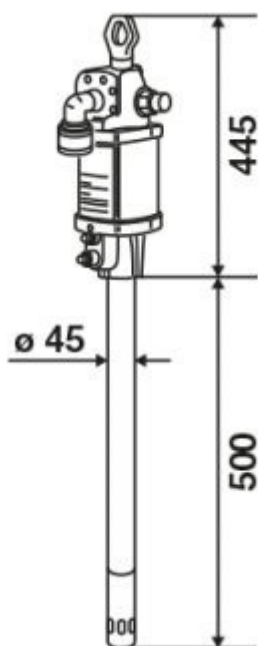

AF-RA-90F/451

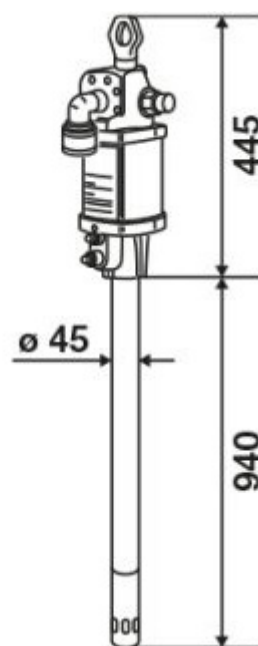

AF-RA-91F/451

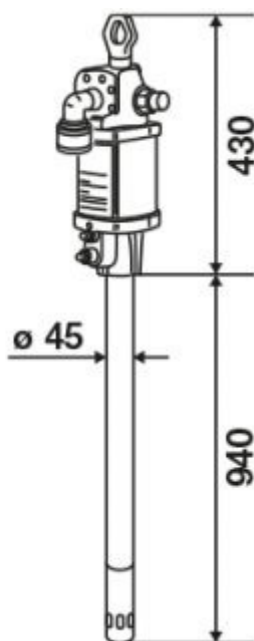

AF-RA-91C/701