


# SPRING REWINDING HOSE REEL SERIES 640



ADVANCED FLUID  
MANAGEMENT SOLUTIONS

NEW

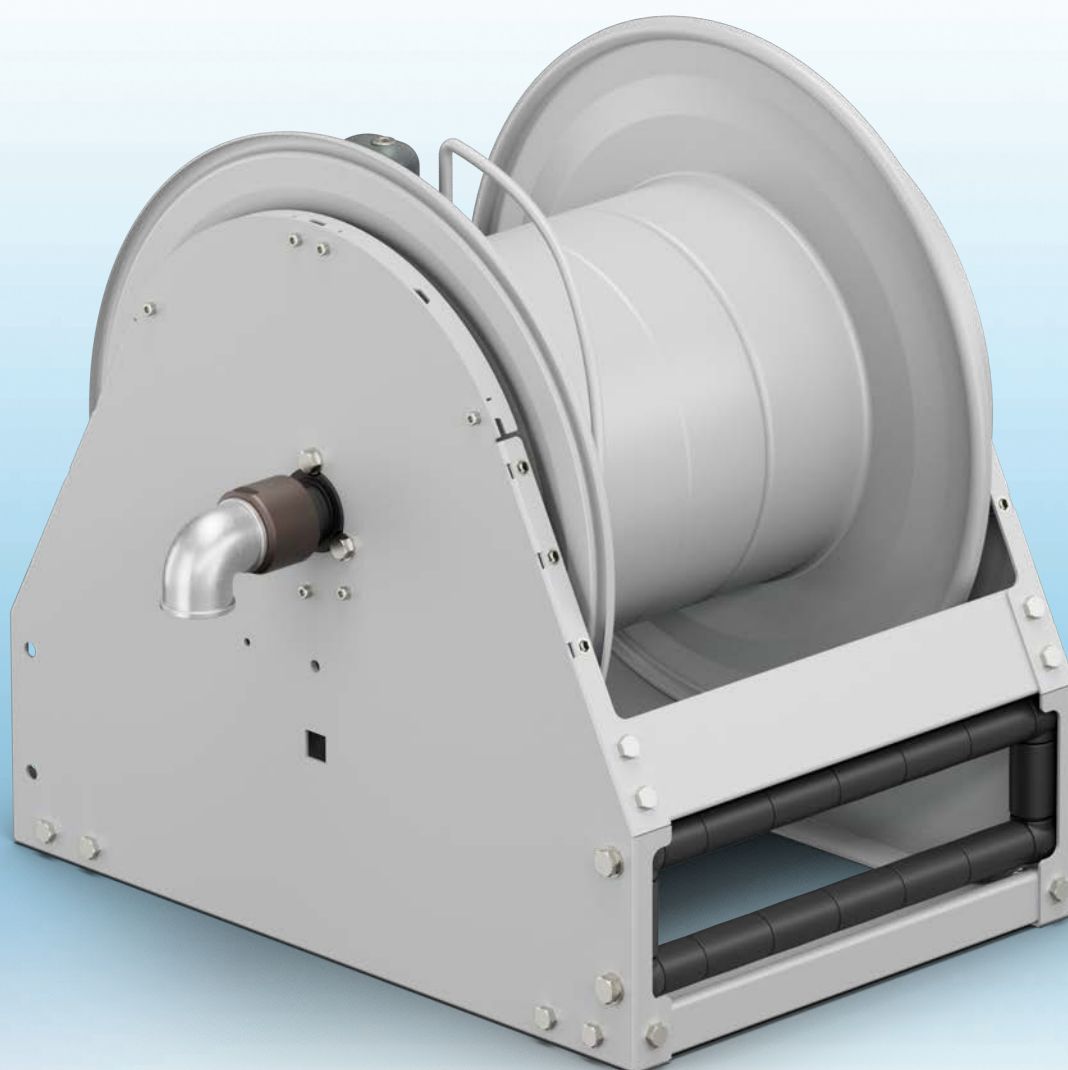

## Spring rewinding hose reel series 640

Hose length: 15 m - 1.1/2" or 20 m - 1.1/4"



Suitable for dispensing **high volume** of diesel fuel, it can be used also for oil and water at low pressure. Ideal to refueling **heavy duty vehicles** or refilling **tanks**.

A special case **protects the spring** from harsh working environment and allows to **replace the spring easily** if necessary.


Spring **tension can be adjusted** depending on the hose length and Ø to be rewound.

# TECHNICAL FEATURES

Spring rewinding hose reel s. 640, for diesel fuel, oil and water 20 bar, without hose.  
Inlet and outlet G 1.1/2" (f)

**p/n** **8640.600**

<b>Pressure</b>	20 bar
<b>Fluids</b>	Diesel fuel, oil, water
<b>Swivel joint</b>	Brass
<b>Seals</b>	Viton®
<b>Main frame</b>	Fixed
<b>Material</b>	Painted steel
<b>Inlet</b>	G 1.1/2" (f)
<b>Outlet</b>	G 1.1/2" (f)
<b>Flow path</b>	Brass- zinc plated steel
<b>Overall dimensions (A-B-C)</b>	645 - 703 - 678 mm

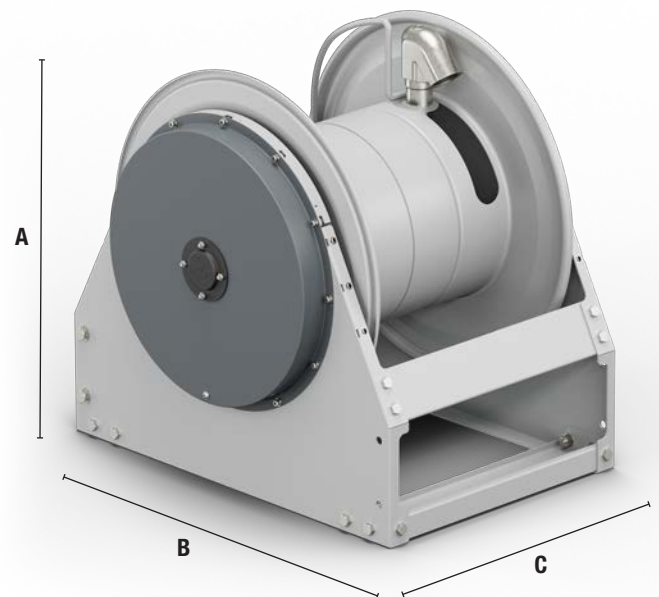


## HOSE CAPACITY

<b>ø 1.1/4"</b>	20 m
<b>ø 1.1/2"</b>	15 m

## SECTORS

- Agriculture
- Road and building constructions
- Mining
- Lube trucks and transport
- Shipyard and offshore
- Manufacturing industry

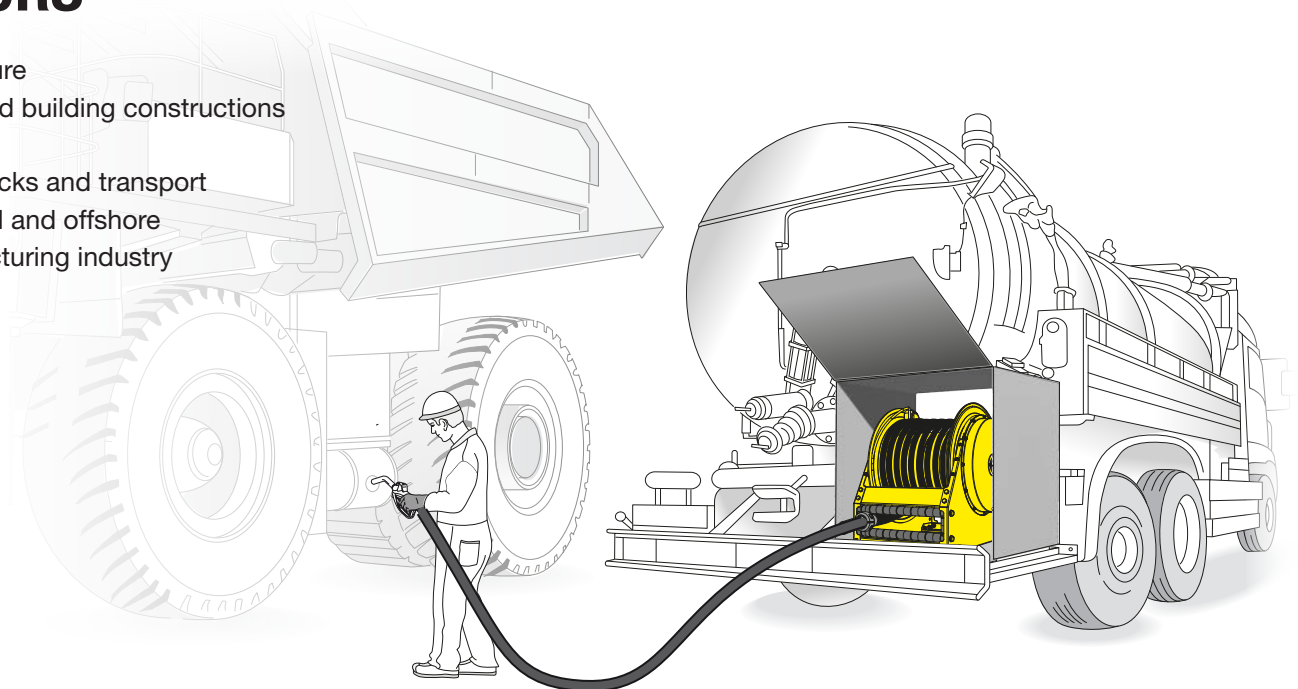

**RAASM S.p.A.**

36022 S. ZENO DI CASSOLA (VI)  
Via Marangoni, 33 - ITALY

[www.raasm.com](http://www.raasm.com)

Export department  
Tel. +39 0424 571130

Technical department  
Tel. +39 0424 571150

[info@raasm.com](mailto:info@raasm.com)  
WhatsApp +39 0424 571150



Scan to  
enter the site



WFRV640-GB  
Rev. 00